

Digital Drawer Safe Product Instructions



Safe Drawer to Suit 600mm Unit.

Thank you for using our products, please read the instructions carefully before installation.

Do not store Instructions, spare keys and USB wire in safe.

1. Product Parameters

Model Name: Digital electronic safe

Working power supply: AA Size Alkaline 1.5V AA batteries x4

Working voltage: 3.5V-6.5V

Start mode: Gear motor & Mechanical transmission.

2. Specifications:


Safe Drawer to Suit 600mm Unit	
Size (Width x Depth x Height) (mm)	Installation size (Width x Depth x Height) (mm)
564X400X150	564X400X150

3. Function Part Reasoning

No.	Function Name	Reason
1	Internal Box	Separate divisions, beautiful, neat and convenient.
2	Touchscreen KeyPad	Tempered touch screen glass, touch to activate panel. Initial password: *1234# BAT: low battery OK: Password is correct ERR: Password is incorrect, wait three seconds & enter again.
3	Reset Hole	Press the "RESET" button for 5 seconds to reset password. This is found near the "OK" button

4	Battery Case	Found inside the safe. Takes 4 x AA (Batteries not supplied)
5	Push Pull Slide	Quiet, smooth, high quality material three ball bearing slide.
6	Spare Key	In the case user cannot open with electronic mode, you can use the key to unlock. Please ensure keys are kept away from safe drawer.
7	USB Port	Standby power plug – this is not a battery charging function. To be used in case of battery failure to power up safe for it to be opened. Ordinary mobile battery 3.7v to supply the drawer with enough power for opening.

Product Assembly Instructions

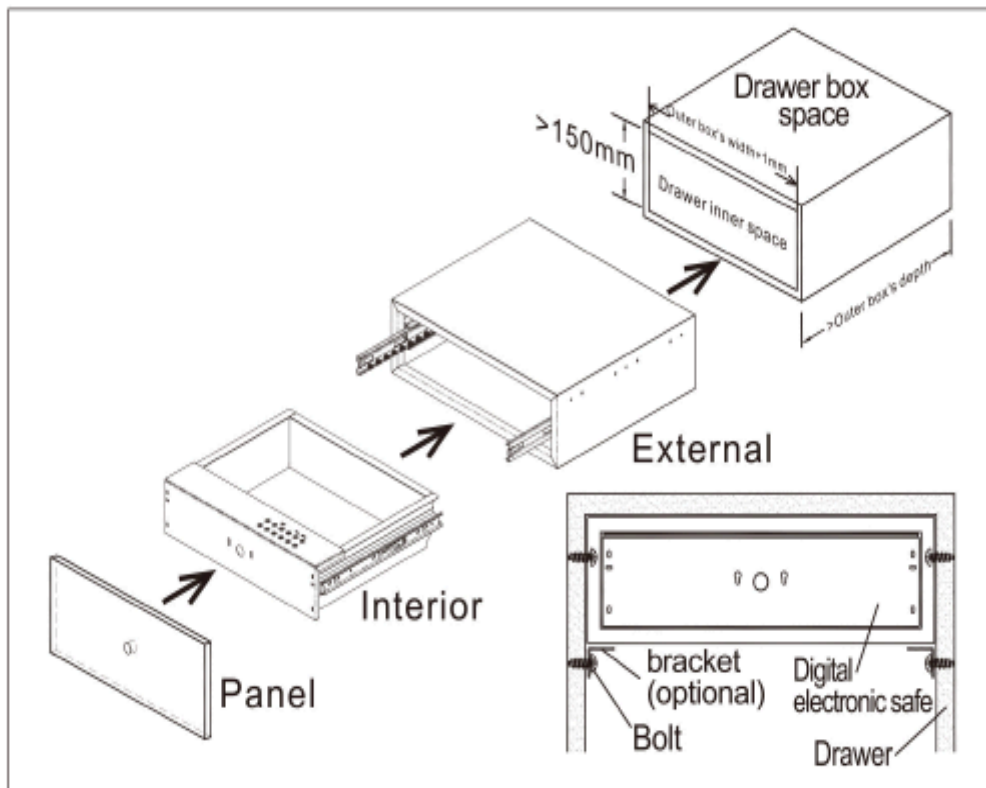

4. Password Function.

(1) How to open the door:

Open the password drawer, touch any key to activate the panel, after the light is on and then "*" input password (initial password is 1234#). You will see the "OK" light illuminate and then a sound will follow and the drawer will automatically open.

(2) How to reset password:

Open the drawer and press the reset button (at the inner side on the drawer) input initial password then the "ok" light will illuminate and flash. Then input your chosen password, password can be 4-6 numbers. Input your chosen password again. When all lights on the screen turn off, this means the password is modified. If this does not work, please repeat the above steps.

Tips:

- (1) If the wrong password is entered incorrectly "ERR" light will illuminate, flash & beep 3 times.
- (2) If the wrong password is entered incorrectly, please re-enter the correct password.
- (3) After changing the password, please ensure the new password works before closing the drawer.

5. Installation Steps.

- (1) **Installation Bracket:** in accordance with the reserved installation location, install the box bracket at the bottom of the box. (Bottom bracket is optional)

- (2) **Separate the drawer:** separate the box and the drawer, take the drawer out of the box. Ensure care is taken to not damage the inside of the drawer lock and electrical parts, do not touch the lock.

- (3) **Install the outer box:** Put the box on the bracket, measure the position of the drawer from the inside of the box to screw the box, locking the outer box into position.

- (4) **Insert the drawer:** put inside the drawer, pay attention to align with the slide rail and push it slowly, don't push with strength. Drawer installation complete.

- (5) **Installation panel:** find the centre line of the panel from inside to install two screws, with distance 62mm and then put the panel to the corresponding hole in the drawer. Close the drawer to check the panel and the drawer position alignment, adjust the two screws to adjust the installation position and finally from the drawer both sides secure the screws and then lock the drawer.

6. Notes

- After using the spare key, you need to turn the key back to remove the key.
- Reminder: Please ensure that you unplug the power cord or remove spare key after using to avoid any misuse damage.
- Touching any key will activate the safe, once illuminated input passcode. The safe will enter power saving mode and will power off if there is no operation for 10 seconds.
- Please close the drawer gently to avoid any damage to the drawer structure.

7. Accessories

- ✓ USB Power line
- ✓ Spare Key
- ✓ Screws pack
- ✓ Case Bracket